



Ultralydsrens

Letmetaller:


Macorr W - temp. 65°
med korrosionsbeskyttelse

Macorr LS - temp. 45°



Jern & stål:

Macorr Soot Remover - temp. 50°

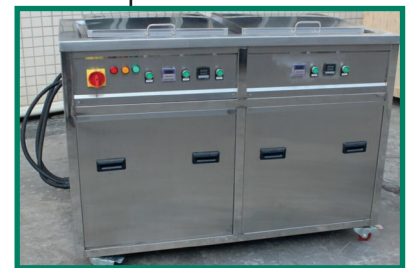

Affedtning / afrensning af:

- Olie
- Fedt
- Sod
- Koks
- Snavs



Brugsopløsning 5-10%



Macorr W
5 liters dunk
Varenummer: 111233



Macorr LS
5 liters dunk
Varenummer: 111243



Macorr Soot Remover
5 liters dunk
Varenummer: 111253