

Macorr LS

Product information

2019-11-22/MDS/JF Copyright©

Product type

- Low-foaming alkaline detergent.
- Low washing temperatures.
- Enhanced corrosion protection.

What to use the product for?

- Degreasing and cleaning of tools, machinery and engine parts, etc. in rinsing and washing machines.
- Removal of dirt, oil, grease, soot and brake dust.
- Particularly suitable for castings.

Product advantages


- Highly effective.
- Low-foaming.
- Optimal effectiveness at 40–50°C.
- Temporary corrosion protection.
- Softening effect.
- Good separation capacity.
- Easily biodegradable.

Working solutions

- Parts with a thin film of oil: 0.5–2%
- Lightly soiled parts: 1–4%
- Heavily soiled parts: 5–10%

Low-foaming detergent with corrosion protection for degreasing in rinsing and washing machines.

Low washing temperatures.

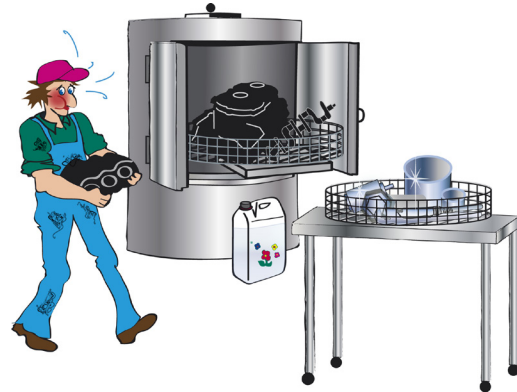

How to use the product

- Use in rinsing/washing machines at 40–50°C.
- Oil that has been separated out must be regularly skimmed off the washing water. Add Macorr LS and clean water as required.
- The waste water “stew” must be disposed of in accordance with the instructions stipulated under “Waste treatment methods” in the Safety Data Sheet for Macorr LS.

Technical information

- pH value of undiluted product: <11.4
- pH value of a 7% solution: c.10.5
- Read the Safety Data Sheet before use.

MAL-code:

- MAL code: 00-3 (1993)
- MAL code in 1–10% solution: 00-1 (1993)