

Alvask Heavy OFFshore

Product information

2019-11-21/MDS/JF Copyright©

Product type

- Strong alkaline cleaning agent.
- Special heavy-duty cleaning and degreasing agent.

What to use the product for?

- Particularly suitable for heavy-duty degreasing, oil removal as well as engine wash and floor wash where oil spills occur.
- Rig wash, equipment wash, engine wash.
- Floor and deck wash.
- Degreasing/cleaning of tools, filters and pumps.
- Dissolution of oil, soot particles, coke, grease, dirt, brake dust and wax.
- Please note: the product may dull glossy surfaces

Product advantages

- Highly effective.
- Easily biodegradable.
- Effectively emulsifies oil and grease with hot water.


Working solutions

- Can be mixed with hot, cold or lukewarm water in any ratio. Hot water increases the effect.
- Cleaning with:

Brush, cloth, sponge	1–5%
Pressure washer	5–10%
Low-pressure sprayer	5%
Heavy-duty washing/ degreasing	5–10%
- Can be used undiluted for extremely tough degreasing jobs.

Rinse with plenty of clean water.

Special detergent for heavy-duty cleaning and degreasing jobs

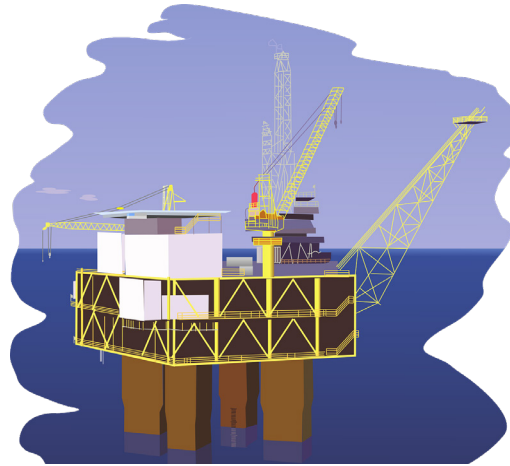

How to use the product

- Moisten the surface with water. Apply the working solution at low pressure (4–5 bar) or with a soft brush.
- Leave the soapy solution to work for 5–10 minutes depending on how dirty the surface is.
- Brush the surface lightly, if necessary.
- Rinse at medium pressure (30 bar).
- Do not allow the detergent/working solution to dry on the surface.

Technical information

- pH value of undiluted product: 13.5–14.0
- Read the Safety Data Sheet before use.

Alvask Heavy OFFshore is registered and approved in accordance with OSPAR Recommendation 2010/3 for HOCNF in NEMS, Certificate no. 34229 DK / no. 34236 Norway.

MAL code:

- MAL code: 00-3(1993)